




CC-S (single), CC-D (double), CC-T (triple) cable cradles from performance Electric, Inc. are manufactured from laser cut 11 gauge cold rolled steel and CNC formed to exact tolerances, then powdercoated for a durable finish. The cable ranges per trough is .75" to 2.00". All necessary hardware is included.

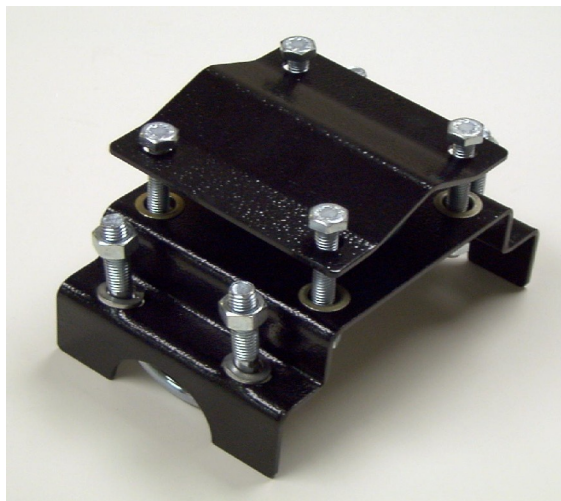

CLP-1 universal cable clamp from Performance Electric, Inc. is manufactured from laser cut 11 gauge cold rolled steel and CNC formed to exact tolerances and then powdercoated for a durable finish. The CLP-1 cable clamp mounts directly to standard 1 1/2" I.D. schedule 40 pipe battens and allows the cable to mount parallel or perpendicular to the pipe batten. The cable range is .75" to 2.25". All necessary hardware is included.